



## 4-Stage Oil Purification System

### Standard Features

- 1.25 GPM Process Flow Rate
- 5kW Heater
- Oil Pump
- Electrical Controls, w/ "On" indicator, alarm lights and phase monitor
- 480V—3Ph—60Hz Power
- H68"xW32"xL40"
- Pressure Gauge
- Suction Filter w/ 60 Micron Element
- Four NTZ Filters w/ 2-5 Micron
- Drip Pan w/ Fork Lift Pockets
- PLC Convenience Port
- One year Warranty
- Operational & Maintenance Manual w/ Spare Parts List


### Safety Features

- E-Stop Pushbutton
- Disconnect Switch
- Alarm Lights

### Standard Options

- Inlet & Outlet Hoses

The 4-Stage Oil Purification System is designed to filter/purify hydraulic oil at a rate of 1.25 gallons per minute. It is based on the concept of multiple passes through multiple filters to remove water, solids, and micro solids. The 4-Stage Oil Purification System requires a 480 volt, 3 phase power supply. Options and custom modifications are available.

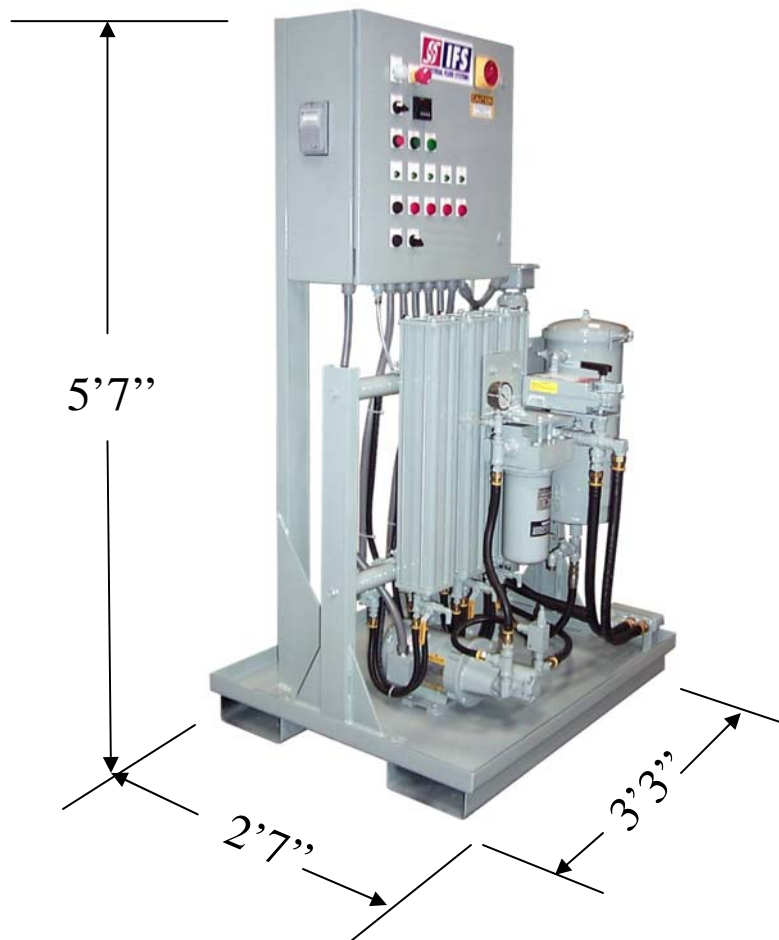

## INDUSTRIAL FLUID SYSTEMS

22200 Ryan Road  
Warren, MI 48091

Phone: 800-343-8106

Fax: 586-754-8284

[www.industrialfluidsystems.com](http://www.industrialfluidsystems.com)